

# FRANCHISE DROP-IN ANCHOR

CEASND/4103

## (Non-Drill Anchor)

### USAGE

All suspension uses with drop rods:

M6 - Suspended ceilings

M10 - Sprinkler systems, ductwork, cable tray, gas and water pipework

### TECHNICAL FEATURES

use with drop rods or bolts/screws, in concrete only.


M6, M8, M10 and M12 sizes available.

Flush fitting

Set independent of fixture (not a thru-fixing)

Shallow embedment

### INSTALLATION

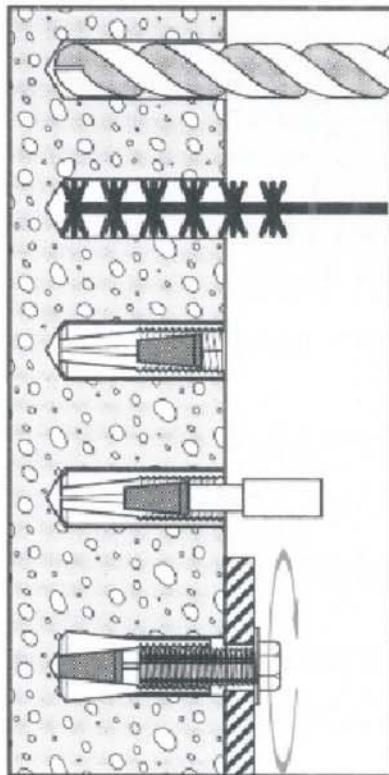


Drill hole to correct diameter and depth (anchor length +2mm)

Clean hole thoroughly (IMPORTANT)

Insert anchor

Drive plug fully home using correct punch and club hammer

Insert drop rod (at least 10 turns) or apply fixing and bolt, tighten to Tinst.

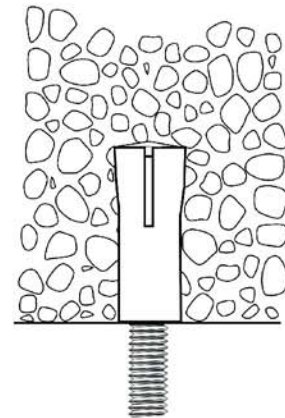

15



**P&M**  
**Fixings & Fasteners**

Unit 6, Franchise Street, Wednesbury,  
West Midlands WS10 9RG  
Telephone: 0121-526 5775  
Fax No.: 0121-568 6108  
E-Mail: [enquire@pmfixings.com](mailto:enquire@pmfixings.com)  
Website: <http://www.pmfixings.com>