


FRANCHISE DRYWALL SCREW OUTLINE



1


DWSBLB/4103

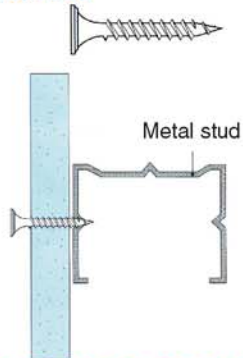

BUGLE HEAD DRYWALL

- Self tapping screw for fixing plasterboard to light gauge metal stud partitions and ceiling systems
- Max Stud Thickness 1.2mm
- Black phosphate or zinc plated
- 25 to 60mm x 3.5mm dia.
- 65 to 75mm x 4.2mm dia.
- 100mm x 4.8mm dia.


DWSSDB/4103

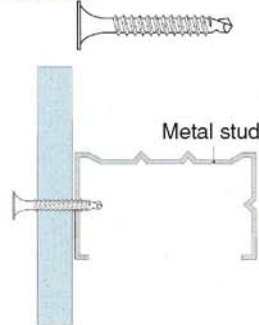

SELF DRILLING DRYWALL

- For fixing plasterboard to heavy gauge metal stud partitions and ceiling systems
- Trade name (TEK)
- Max Stud Thickness 1.6mm
- Zinc plated
- 25 to 60mm x 3.5mm dia.
- 65 to 75mm x 4.2mm dia.


DWSCTD/4103

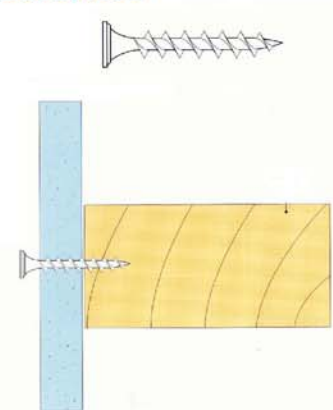

COARSE THREAD DRYWALL

- For attaching plasterboard to timber stud partitioning and ceiling joists
- Black finish
- 25 to 50mm x 3.5mm dia.
- 65 to 75mm x 4.2mm dia.


DWSWHB/4103

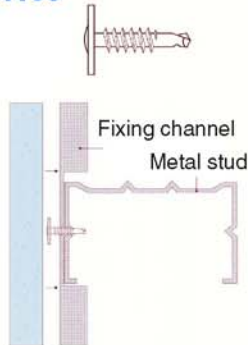

WAFER HEAD SELF DRILL

- Low profile large diameter head for connecting heavy gauge metal components beneath plasterboard
- Trade name (TEK)
- Max Stud Thickness 1.6mm
- Zinc plated
- 13 x 4.2mm dia.


DWSNSW/4103

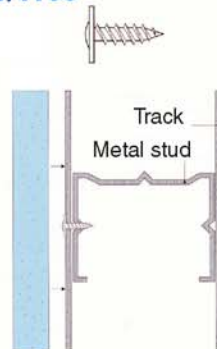

WAFER HEAD NON-SELF DRILL

- Low profile large diameter head for connecting light gauge metal components beneath plasterboard
- Max Stud Thickness 1.2mm
- Zinc plated
- 13 x 4.2mm dia.

DWSPHB/4103

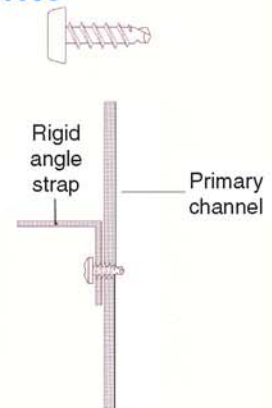

PAN HEAD SELF DRILLING

- For fixing light gauge metal components to aluminium or steel
- Trade name (TEK)
- Max stud thickness 1.6mm
- Zinc plated
- 13,25,32 and 38 X 4.2mm dia.



P&M
Fixings & Fasteners

Unit 6, Franchise Street, Wednesbury,
West Midlands WS10 9RG
Telephone: 0121-526 5775
Fax No.: 0121-568 6108
E-Mail: enquire@pmfixings.com
Website: <http://www.pmfixings.com>