

FRANCHISE BLACK DRYWALL SCREWS

DWSBLB/4103



BUGLE HEAD DRYWALL

- Self tapping screw for fixing plasterboard to light gauge metal stud partitions and ceiling systems
- Max Stud Thickness 1.2mm
- Black phosphate or zinc plated
- 25 to 60mm x 3.5mm dia.
- 65 to 75mm x 4.2mm dia.
- 100mm x 4.8mm dia.

DRYWALL SCREWS #8 (M4.2) SS

t	2.60-3.10mm
Recess No	2
Material & Case Hardness	C1018 Steel, case depth 0.1mm
Surface Harden	550-800 HV 0.3
Breaking Torque	42Kg/cm
Material Din	3.15

DWSBLB

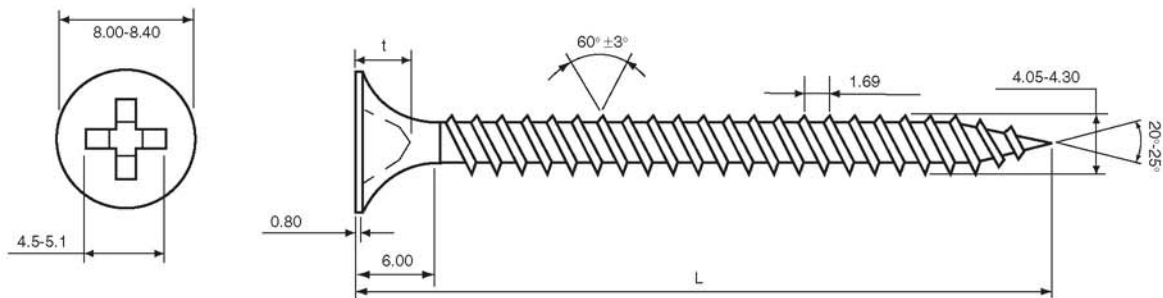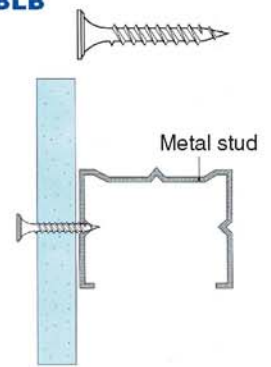

L	1"	1-1/4"	1-1/2"	1-5/8"	1-3/4"	2"	2-1/4"	2-1/2"	3"	4"
L	25mm	32mm	38mm	41mm	44mm	51mm	57mm	64mm	76mm	102mm
Min	24.35	30.50	36.85	40.05	43.20	49.30	55.65	62.00	74.70	99.85
Max	26.45	33.00	39.35	42.55	45.70	52.30	58.65	65.00	77.70	103.35



P&M
Fixings & Fasteners

Unit 6, Franchise Street, Wednesbury,
West Midlands WS10 9RG
Telephone: 0121-526 5775
Fax No.: 0121-568 6108
E-Mail: enquire@pmfixings.com
Website: <http://www.pmfixings.com>